Any fee due as a result of this paper, not of

enclosed check, may be charged on Deposit Acct. No. 50-1290.

Attorney Docket No.: WOLF 19.787 (100616-00057)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor

: WOLF, David, et. al.

Serial No.

: concurrently herewith

Filed

: concurrently herewith

Priority Date

: 15 August 2002 (15.08.02)

Title

: Light Fixture Cross-Reference to Related Applications

10 February 2005

Commissioner For Patents PO Box 1450 Alexandria, VA 22313-1450

PRIORITY CLAIM

SIR:

This application is the National Stage of International Application No. PCT/US2003/025837, filed 14 August 2003, which claims the benefit under 35 U.S.C. 119(e) of Provisional Patent Application No. 60/403,698, filed 15 August 2002, and Provisional Patent Application No. 60/468,206, filed 06 May 2003 now pending, which is hereby incorporated by reference.

Respectfully submitted,

Hassan A. Shakir Reg. No. 53,922

CUSTOMER NUMBER 026304

Tel. (212) 940-8800/ Fax. (212) 940-8986

Rec'd PCT/PTO 10 FEB 2005

私

REC'D 07 OCT 2003

WIPC POT

ANIO PAGONIU A PO DESTANDE COM

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE United States Patent and Trademark Office

September 30, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/468,206

FILING DATE: *May 06, 2003*

RELATED PCT APPLICATION NUMBER: PCT/US03/25837




By Authority of the COMMISSIONER OF PATENTS AND TRADEMARKS

P. R. GRANT Certifying Officer

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)





PTO/SB/16 (8-00)

Approved for use through10/31/2002. OMB 0851-0032

U.S. Palent and Trademark Office; U.S. DEPARTMENT OF COMMERCE


Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET This is a request for filing a PROVISIONAL APPLICATION FOR PATENT unde

OKT ATENT dilder 57 CFR 1.53(c).					
		INVENTOR(S	5)		
Given Name (first and middle [fi David Bugene	Wo	Family Name or Surname WOLF		Residence (City and either State or Foreign Country) Brooklyn, New York	
		DIACONU		Bensalem, Pennsylvania	
Additional inventors are being named on the separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
LIGHT FIXTURE					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
Customer Number	026304		Place Customer Number		
OR .					
Firm or Individual Name					
Address					
Address					
City		State	7	ZIP	
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
Specification Number of Pages CD(s), Number					
Drawing(s) Number of Sheets 9 Application Data Sheet. See 37 CFR 1.76 Value of Sheets Value of					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
Applicant claims small entity status. See 37 CFR 1.27.					
A check or money order is enclosed to cover the filing fees AMOUNT (\$)					
The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 50-1290 \$80.00					
Payment by credit card. Form PTO-2038 is attached,					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
No. □					
Yes, the name of the U.S. Government agency and the Government contract number are:					
Respectfully submitted,			Date 5 /	06,03	·
YPED or PRINTED NAME	·	REGISTRATION NO. (if appropriate) Docket Number: WOLF 19.787P-A		39,432	
ELEPHONE 212-940-				WOLF 19.787P-A	

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant



Filed by Express Mail (Receipt No.EV.3322849950) on MOU Express Mail (Receipt No.EV.332284950) on MOU Express Mail (Rec

LIGHT FIXTURE

The present invention is related to U.S. Provisional Application 60/403,698 filed August 15, 1998.

FIG. 1 is an exploded side view of one embodiment of the light fixture of the present invention. FIG. 2 is a perspective view thereof. FIG. 3 is an exploded perspective view thereof. FIG. 4 is an assembled side view thereof shown in cross-section. FIG. 5 is an exploded side view of an alternative embodiment of the light fixture of the present invention. FIG. 6 is a perspective view thereof. FIG. 7 is an exploded perspective view thereof. FIG. 8 is an assembled side view thereof shown in cross-section. FIG. 9 is an exploded perspective view of one embodiment of a firebox of the present invention for housing a light fixture of the present invention. FIG. 10 illustrates a light fixture housed in the firebox of FIG. 9. FIG. 11 is a perspective view of the firebox of the invention with insulation retainers.

With respect to the embodiment of FIGS. 1-4, the light fixture is molded in polycarbonate as one piece. The junction box is part of the can. It features vents above the fluorescent lamp socket to release heat. The fluorescent lamp socket is secured between the socket holder plate and a back plate, which clip together. The junction box has knockouts molded into both sides for electrical connections. The baffle clips into the can using cantilever clips, making it removable. The ceiling ring is low profile and clips into the baffle. This snap-in ceiling ring insures simpler removal from the ceiling. The

5

10

15

20

reflector is secured to the can by 2 screws. Ellipsoidal geometry is used to create the form factor of the reflector, achieving superior light output efficiencies. The junction box has 2 hinged lids one on top, one on bottom, for ease of wiring. The can has 4 holes on top to fasten a framing kit.

With respect to the embodiment of FIGS. 5-8, which is preferably smaller than the embodiment of FIGS. 1-4, the light fixture is molded in polycarbonate as one piece. The embodiment of FIGS. 1-4 illustrates an eight-inch can, while the embodiment of FIGS. 5-8 illustrates a six- or seven-inch can. The reflector is part of the can instead of a separate part that is fastened inside the can. Ellipsoidal geometry is used to create the form factor of the reflector, achieving superior light output efficiencies. The junction box is also a part of the can. The fluorescent lamp socket clips into the polycarbonate socket bracket, which slides into the junction box and is held in place by 4 ribs. The junction box has knockouts molded into both sides for electrical connections. The baffle clips into the can using cantilever clips, making it removable. The ceiling ring is low profile and clips into the baffle. This snap-in ceiling ring insures simpler removal from the ceiling. The hanger bar supports are also molded into the can instead of a separate framing kit.

The firebox of FIGS. 9-12 is preferably fabricated with twenty-four gauge (.024 in) galvanized sheet metal with triangular protrusions from the top of each wall to secure the insulation when bent ninety degrees inward. One and one-half inch thick mineral wool insulation is provided on all sides and top, held in place by four galvanized sheet

5

10

15

20

metal retainers riveted to the firebox front and back walls. A quarter-inch compressed fiberglass pad on the bottom of the fire box acts as an insulator against the ceiling sheet rock. The light fixture of the invention rests inside the box and has a flexible wire housing that connects the front of the metal firebox where external wires are connected.

While the present invention has been described and illustrates in the appended figures, such description and illustration is not intended to be limited to any such particulars or embodiments or any particular embodiment shown herein. Furthermore, the foregoing describes the invention in terms of embodiments foreseen by the inventor for which an enabling description was available, notwithstanding that insubstantial modifications of the invention, not presently foreseen, may nonetheless represent equivalents thereto.

5

10

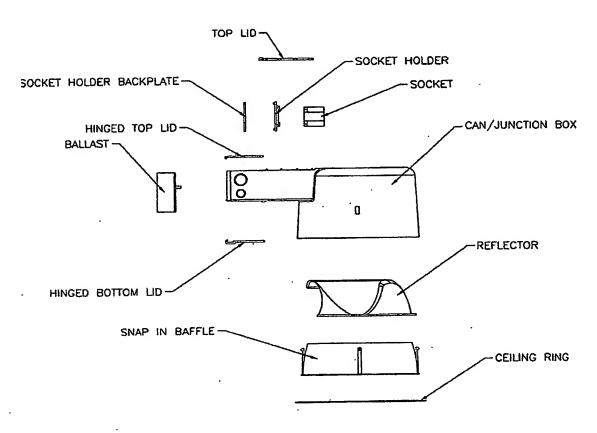


FIG. 1

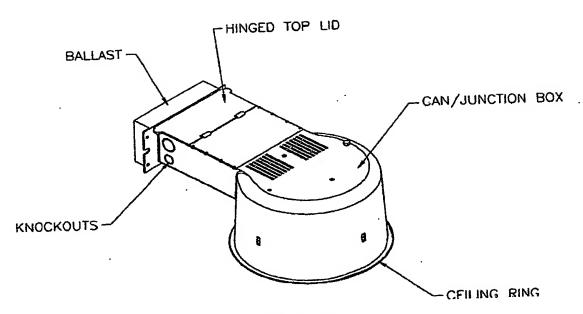


FIG. 2

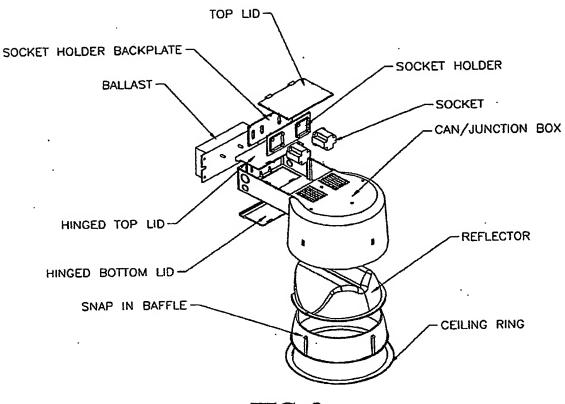


FIG. 3

WOLF 19.787PA (100616-?????) 11159565.01

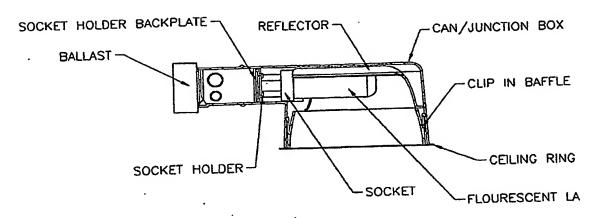


FIG. 4

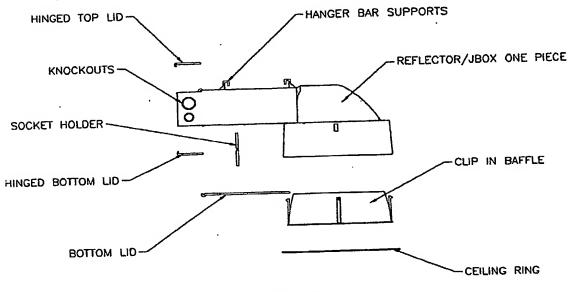


FIG. 5



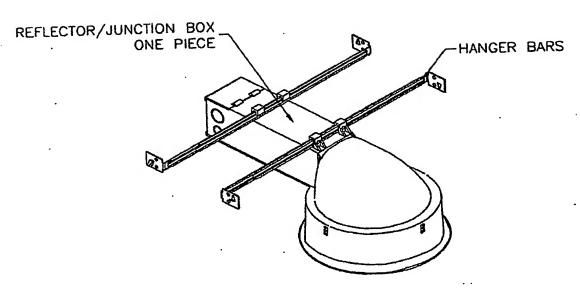


FIG. 6

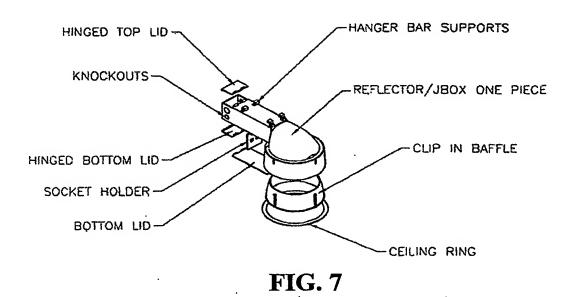

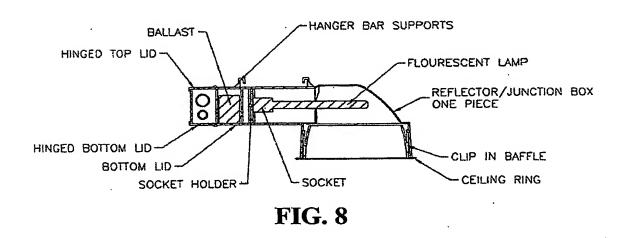

WOLF 19.787PA (100616-?????) 11159565.01

a a

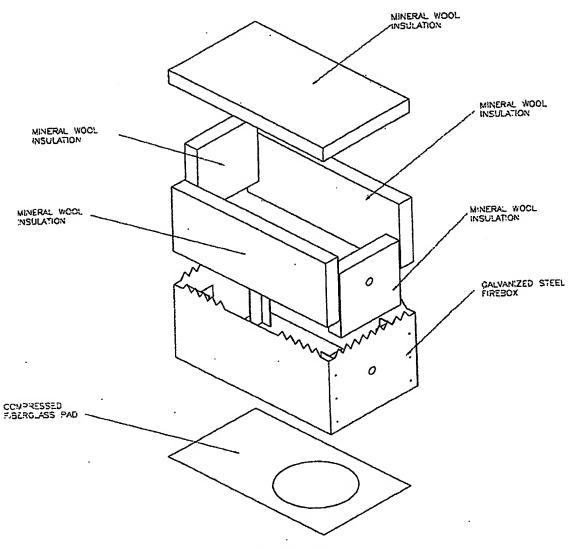


FIG. 9

WOLF 19.787PA (100616-?????) 11159565.01

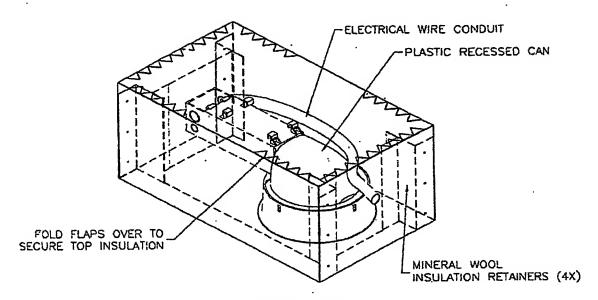


FIG. 10

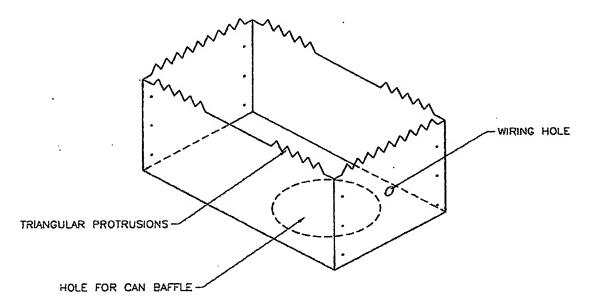


FIG. 11

WOLF 19.787PA (100616-?????) 11159565.01

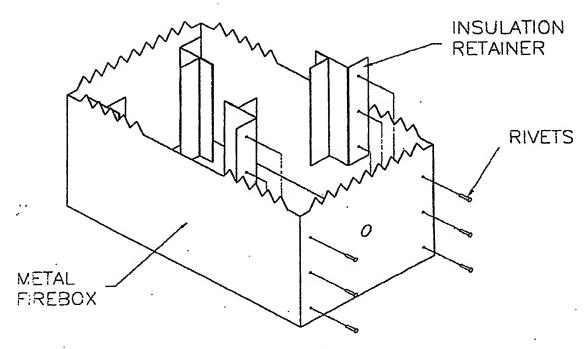


FIG. 12